


AstroSemi™

Incredible Power for Small Body

330W~340W

Monocrystalline PV Module

CHSM60M-HC Series (158.75)

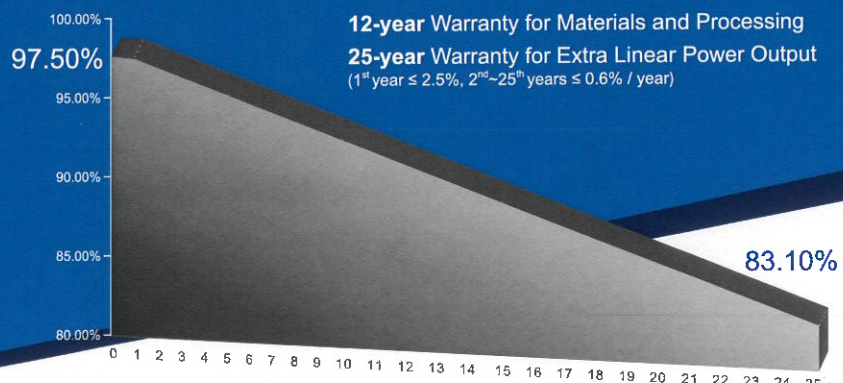

KEY FEATURES

- +5W OUTPUT POSITIVE TOLERANCE**
Guaranteed 0~+5W positive tolerance ensures power output reliability.
- INNOVATIONAL HALF-CELL TECHNOLOGY**
Improves the module output, decreases the risk of micro-crack, enhances the module reliability.
- REDUCE SHADOW LOSS**
Effectively reduces the effect of shadow on the module surface.
- REDUCE INTERNAL MISMATCH LOSS**
Reduces mismatch loss and improves output.

* Optional: Black frame designed for the certain projects and applications (e.g. residential rooftop and so on)

COMPREHENSIVE CERTIFICATES



Special for Australian Market



ELECTRICAL SPECIFICATIONS

STC rated output (P_{mpp})*	330 Wp	335 Wp	340 Wp
Rated voltage (V_{mpp}) at STC	34.17 V	34.44 V	34.69 V
Rated current (I_{mpp}) at STC	9.66 A	9.73 A	9.80 A
Open circuit voltage (V_{oc}) at STC	41.32 V	41.61 V	41.88 V
Short circuit current (I_{sc}) at STC	10.14 A	10.22 A	10.30 A
Module efficiency	19.5%	19.8%	20.1%
Rated output (P_{mpp}) at NMOT	246.1 Wp	249.8 Wp	253.5 Wp
Rated voltage (V_{mpp}) at NMOT	31.85 V	32.10 V	32.35 V
Rated current (I_{mpp}) at NMOT	7.73 A	7.78 A	7.84 A
Open circuit voltage (V_{oc}) at NMOT	38.85 V	39.12 V	39.37 V
Short circuit current (I_{sc}) at NMOT	8.16 A	8.22 A	8.28 A
Temperature coefficient (P_{mpp})		- 0.3438%/°C	
Temperature coefficient (I_{sc})		+0.0353%/°C	
Temperature coefficient (V_{oc})		- 0.2722%/°C	
Nominal module operating temperature (NMOT)		44±2°C	
Maximum system voltage (IEC/UL)		1500V _{DC}	
Number of diodes		3	
Junction box IP rating		IP 67	
Maximum series fuse rating		20 A	

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5


NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

MECHANICAL SPECIFICATIONS



Outer dimensions (L x W x H)	1692 x 1002 x 35 mm 66.61 x 39.45 x 1.38 in
Frame technology	Aluminum, silver / black anodized
Module composition	Glass / EVA / Backsheet (white)
Front glass thickness	3.2 mm / 0.13 in
Cable length (IEC/UL)	Portrait: 350 mm (13.78 in) Landscape: 1100 mm (43.31 in)
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Fire performance (IEC/UL)	Class C (IEC) or Type 1 (UL)
Connector type (IEC/UL)	MH5(Logo:MINGHE) or PV-KST4-EVO2/XY-UR,PVKB4-EVO2/XY-UR(Logo:MC)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

MODULE DIMENSION DETAILS

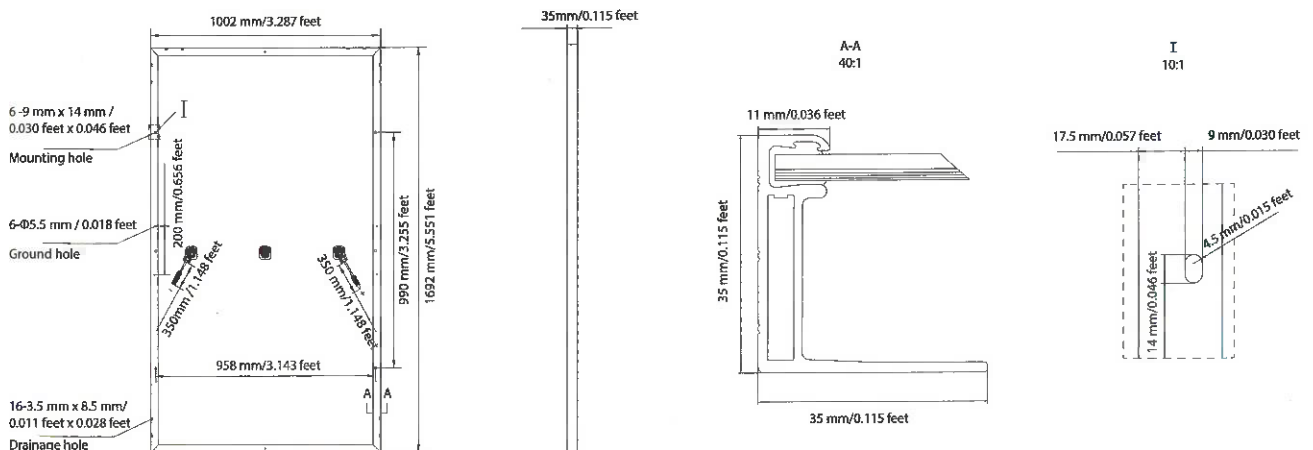

CURVE

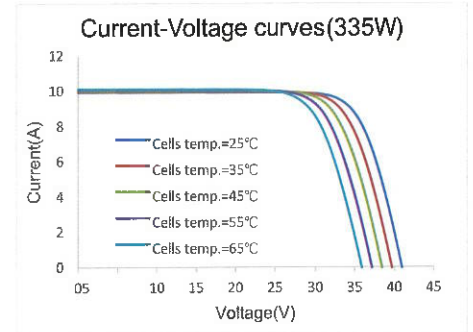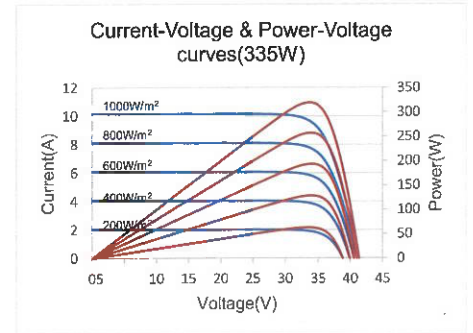

PACKING SPECIFICATIONS

① Weight (module only)	19.1 kg / 42.11 lbs
② Packing unit	31 pcs / box
Weight of packing unit (for 40'HQ container)	631 kg / 139 lbs
Number of modules per 40'HQ container	806 pcs

① Tolerance +/- 1.0kg
② Subject to sales contract

Made in Zhejiang, Jiangsu and Anhui of China, Made in Sincan/ Ankara of Turkey.

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation, please contact our company to use the latest version for contract.

<http://energy.chint.com>

Astronergy 03-2020